



Disassembling HTC ONE V Bottom Assembly

This will be a prerequisite to opening the phone.

Written By: Michael Lucido





TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Bottom Assembly





- Power off your device.
- Remove the bottom cover by sliding it off.

Step 2




- Remove your SIM card.
- Remove the four screws securing on the bottom casing.
 - Two 3.0 mm Philips #0 screws in the top left and right corners.
 - Two 2.0 mm Philips #0 screws in the bottom left and right corners.

Step 3

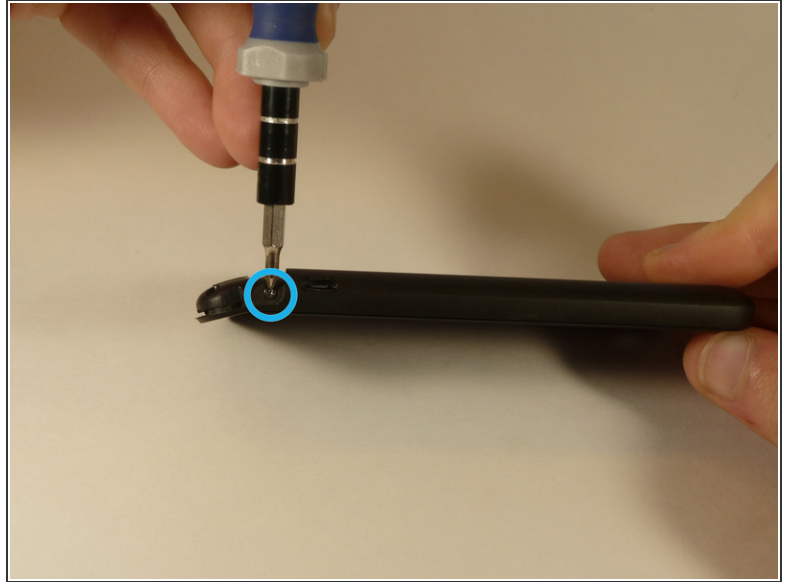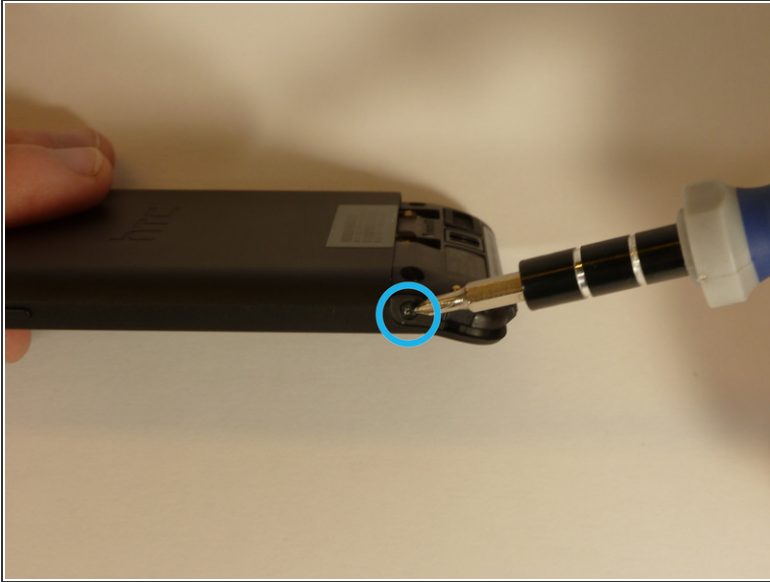

- Remove the 2.0 mm Philips #0 screw. There is an identical screw in the same spot on the other side of the phone.

Step 4

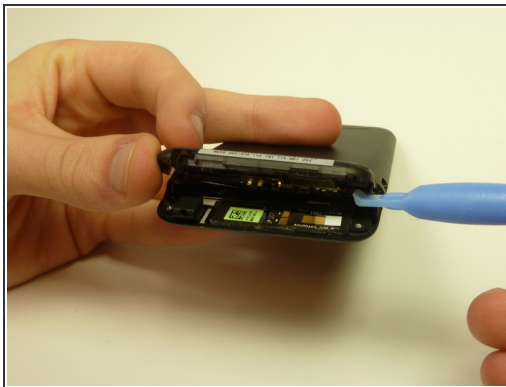

- Use a plastic opening tool to pry open the bottom casing.
- Remove the bottom casing by pulling it towards you.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-06 03:45:10 AM.